

FIRST NATIONAL
battery™
WORLD CLASS BATTERY MANUFACTURER

**RENEWABLY
RENEWABLE ENERGY**

OPzV Gel




TECHNICAL DETAILS

- Tubular positive plates
- Pasted negative plates
- Electrolyte immobilised in a gel
- Separators
- Containers and lids made of ABS
- Easy installation
- One way relief valve
- Terminals: Female threaded (M8)
- High integrity post seal
- Long life
- Valve regulated lead acid recombination technology
- Standby battery manufacture conforms to ISO 9001

**Corner Liverpool & Bristol Roads,
Benoni South, 1502
P.O. Box 5015 Benoni South, 1502
South Africa
Telephone: +27 11 741 3600
Fax: +27 11 421 2642**

CELL TYPE	Ah @ C20	Ah @ C10	Ah @ C5	Length mm	Width mm	Height Lid- mm	Height O/A- mm	Weight Approx kg
4 OPZV 200	220	205	190	103	206	363	403	22
5 OPZV 250	275	255	238	124	206	363	403	26
6 OPZV 300	325	300	280	145	206	363	403	32
5 OPZV 350	405	380	350	124	206	480	520	35
6 OPZV 420	485	455	420	145	206	480	520	41
7 OPZV 490	565	530	490	166	206	480	520	47
6 OPZV 600	765	710	660	145	206	655	695	56
8 OPZV 800	1020	950	880	191	210	655	695	76
10 OPZV 1000	1275	1190	1100	233	210	655	695	92
12 OPZV 1200	1530	1425	1320	275	210	655	695	110
12 OPZV 1500	1890	1760	1632	275	210	805	845	136
16 OPZV 2000	2520	2350	2176	397	212	772	812	185
20 OPZV 2500	3155	2935	2720	487	212	772	812	224
24 OPZV 3000	3785	3525	3264	576	212	772	812	269

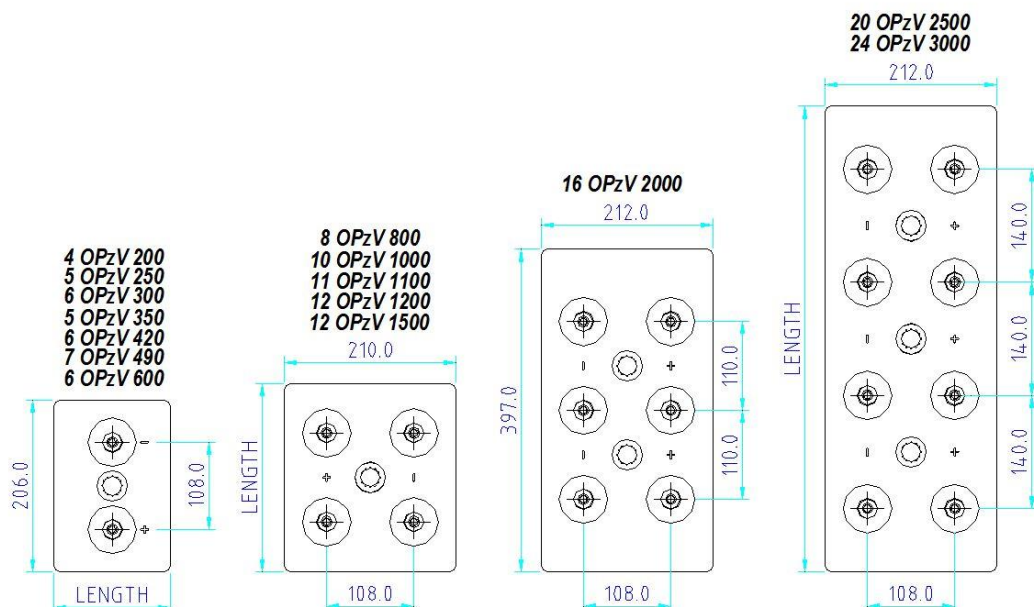

In the interests of continuing advancement we reserve the right to modify specifications without prior notice.
Copyright subsists in this work. Any unauthorised reproduction, adaption and copying of this document are acts of copyright infringements and entitles First National Battery to take action.